

3.3V LVCMOS Surface Mount Crystal Clock Oscillator CWX813

CONNOR WINFIELD



Features:

- 1 MHz to 156.25 MHz
- 3.3V Operation
- RoHS Compliant
- Frequency Tolerance: ± 25 ppm
- Temperature Range: -20 to 70°C
- Low Jitter: <1 pS RMS
- Tri-State Enable / Disable
- Ceramic Surface Mount Package
- Tape and Reel Packaging

XO

The Connor-Winfield CWX813 is a RoHS compliant 3.3V, LVCMOS, 7.5x5mm, surface mount, oscillator (XO). This fixed frequency crystal oscillator is designed for use in applications requiring high stability and low jitter. The surface mount package is designed for high-density mounting and is optimum for mass production.

2111 Comprehensive Drive
Aurora, Illinois 60505
Phone: 630-851-4722
Fax: 630-851-5040
www.conwin.com

US Headquarters:
630-851-4722
European Headquarters:
+353-61-472221

Absolute Maximum Ratings

Parameter	Minimum	Nominal	Maximum	Units	Notes
Storage Temperature	-55	-	125	°C	
Supply Voltage (Vcc)	-0.5	-	7.0	Vdc	

Operating Specifications

Parameter	Minimum	Nominal	Maximum	Units	Notes
Frequency Range (Fo)	1.00	-	100.00	MHz	
Additional Frequencies Available	106.25, 125.00, 155.52 and 156.25			MHz	
Frequency Tolerance	-25	-	25	ppm	1
Operating Temperature Range	-20	-	70	°C	
Supply Voltage (Vdd)	3.63	3.30	2.97	Vdc	
Supply Current (Icc)	-	-	30	mA	

Input Characteristics

Parameter	Minimum	Nominal	Maximum	Units	Notes
Enable Voltage - (Vih)	≥ 2.2	-	-	Vdc	2
Disable Voltage - (Vil)	-	-	≤ 0.8	Vdc	

HCMOS Output Characteristics

Parameter	Minimum	Nominal	Maximum	Units	Notes
Load	-	-	15	pF	
Voltage High (Voh)	2.97	-	-	Vdc	
Voltage Low (Vol)	-	-	0.33	Vdc	
Current High (Ioh)	-8	-	-	mA	
Current Low (Iol)	-	-	8	mA	
Duty Cycle at 50% of Vcc	40	50	60	%	
Rise / Fall Time 10% to 80%	-	2	6	nS	
Start-Up Time	-	-	10	mS	
Jitter (BW=10Hz to 20MHz)	-	-	5	pS RMS	
Jitter (BW=12kHz to 20MHz)	-	-	1	pS RMS	

Package Characteristics

Package Hermetically sealed ceramic package

Notes:

1. Inclusive of calibration @ 25°C, frequency vs temperature stability, supply voltage change, load change, shock and vibration, 10 years aging.
2. Oscillator output is enabled with no connection on pad 1

Standard Frequencies Available (MHz)

1.544	1.8432	2.048	3.6864	4	5
6.48	8	10	11.0592	12	12.288
14.31818	15.36	16	16.896	19.44	20
24	24.576	25	27	29.498928	29.4912
30	32.768	33	33.33	36	40
44.736	48	49.152	50	60	66
75	80	100	106.25	125	155.52 156.25

Specifications subject to change without notice. All dimensions in inches. © Copyright 1998 The Connor-Winfield Corporation



Bulletin **Sm111**
Page **1 of 2**
Revision **03**
Date **09 Aug 2007**



Environmental Characteristics

Temperature Cycle	The specimen shall meet electrical characteristics after tested 5 cycles of -55°C / 30 minutes and +125°C / 30 minutes
Hermetical	No bubbles appear in Flourinert (FC-43) at 125°C ±5°C for 5 minutes
Solvent Resistance	Marking will withstand immersion in Isopropyl Alcohol or Trichloroethylene


Soldering

General Conditions	260°C max x 10 sec max x 2 times max or 230°C max x 180 sec max x 1 time
Typical Operation Data (Vapor phase reflow)	20 to 100 sec up to 215°C, 50 sec at 215°C, then down to room temperature per 1 to 5°C / sec

Mechanical Characteristics

Free Drop	The specimen shall meet electrical characteristics after tested 3 times, Free Drop testing on the hard wooden board from a height of 75 cm.
Vibration	The specimen shall meet electrical characteristics after tested by the following conditions: 10-55Hz 1.5mm Amplitude, 55-2000 Hz 20 G's, 2 hours for each plane
Thermal Shock	After applied Thermal Shock of 260°C max x 10 sec max x 2 times, or 230°C max x 180 sec max, the specimen shall meet electrical characteristics
Solderability	(EIAJ-RCX-0102.101 Condition 1a) 1) Flux: MIL-F-14256 (WW Rosin=25%, Isopropyl Alcohol = 75%) 2) Solder: QQ-S-571 (Sn = 63%, Pb = 37%) 3) Solder bath temperature: 235°C ±5°C 4) Depth of immersion: Up to electrical terminal 5) Immersing time: Within 2 sec ±0.5 sec into solder bath


After performing the above procedures, a newly soldered coverage shall be greater than 90%

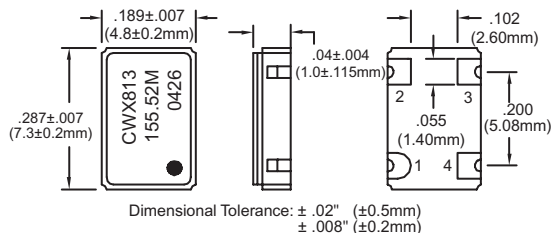

Pad Connection

- 1: Enable / Disable
- 2: Ground
- 3: Output
- 4: Vcc


Suggested Pad Layout

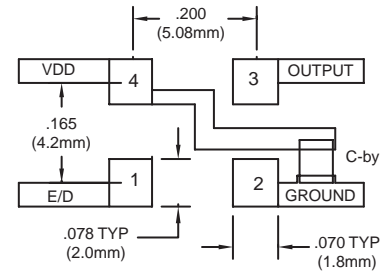

Bypass capacitor, C-by, should be ceramic capacitor ≥ .01uf.

Dimensional Tolerance: ±.02" (.508mm)
±.008" (0.2mm)


Test Circuit

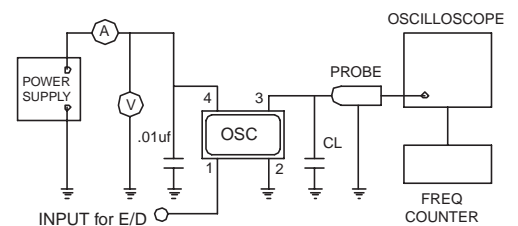


Enable/Disable Function Output

Enable/Disable Function	Output
Pin 1 Open	Pin 3 Active
Pin 1 ≥ 2.2V	Pin 3 Active
Pin 1 ≤ 0.8V	Pin 3 High Impedance

Output Waveform

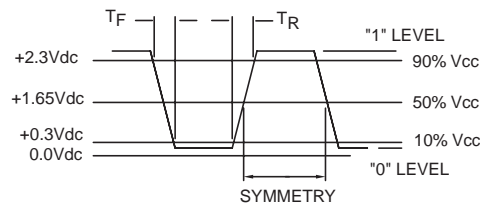

Tape and Reel Dimensions

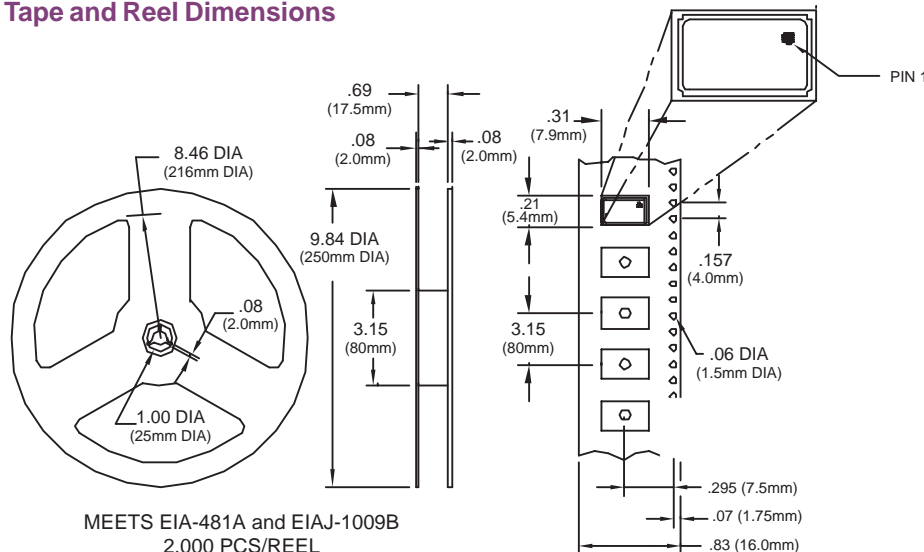

Ordering Information

CWX813 - 155.52 MHz

CLOCK SERIES CENTER FREQUENCY

Bulletin	Sm111
Page	2 of 2
Revision	03
Date	09 Aug 2007